

MODEL TLH-5920



International size reference: C, ER26500

TECHNICAL DATA

(Typical values @+ 25°C for batteries stored for one year or less)



| | |
|--|-------------------|
| ■ Nominal capacity @ 3 mA, to 2 V | 7.5 Ah |
| ■ Rated voltage | 3.6 V |
| ■ Maximum recommended continuous current | 230 mA |
| ■ Maximum pulse current capability | 400 mA |
| ■ Weight | 49.5 g (1.75 oz) |
| ■ Volume | 26 cc |
| ■ Operating temperature range | -55 °C to +125 °C |
| ■ Li metal content | approx. 2.5 g |
| ■ U.L. Component Recognition, MH 12193 | |

TADIRAN LITHIUM BATTERIES

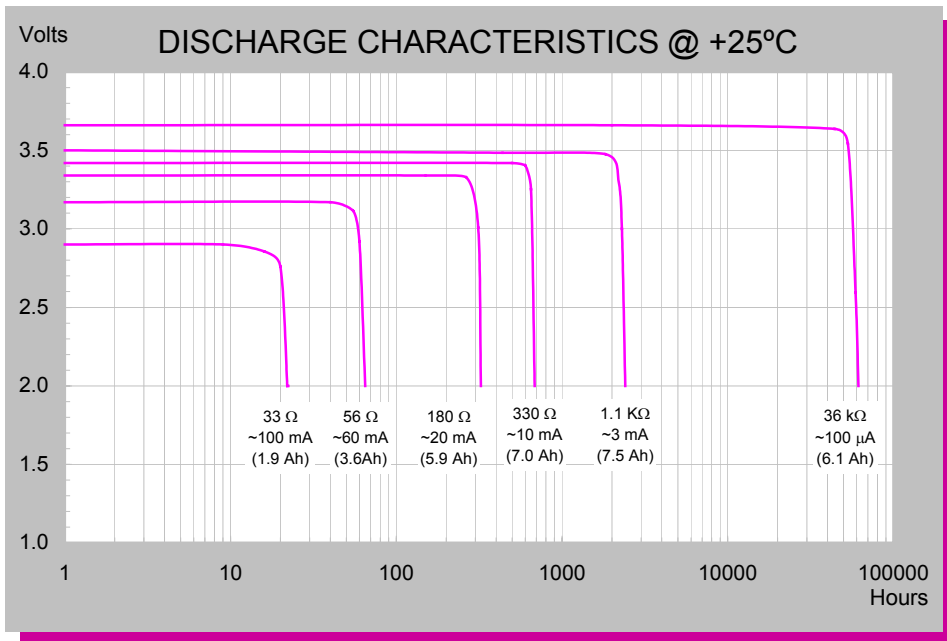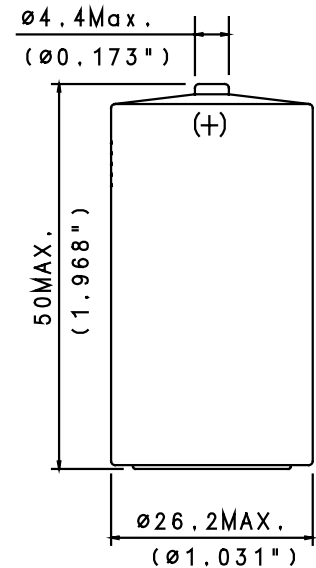

TERMINATIONS & ORDERING NO.

| | |
|------------------------|---------------|
| SUFFIX- /S STANDARD | 15-5920-21505 |
| SUFFIX- /T SOLDER TABS | 15-5920-31505 |
| SUFFIX- /P AXIAL PINS | 15-5920-41505 |

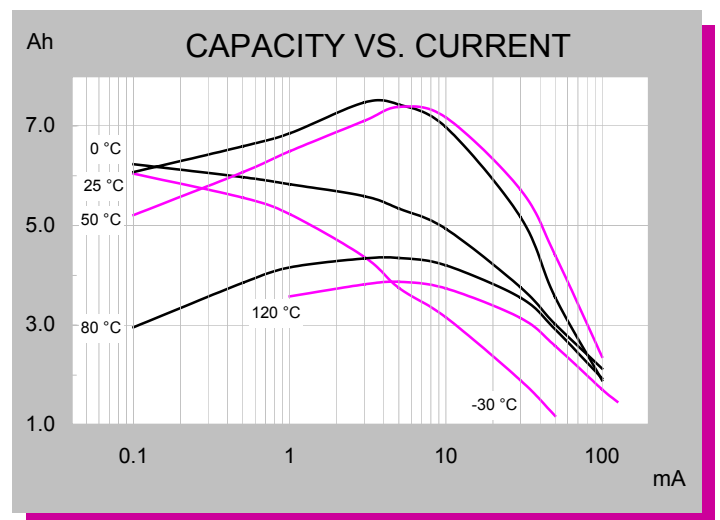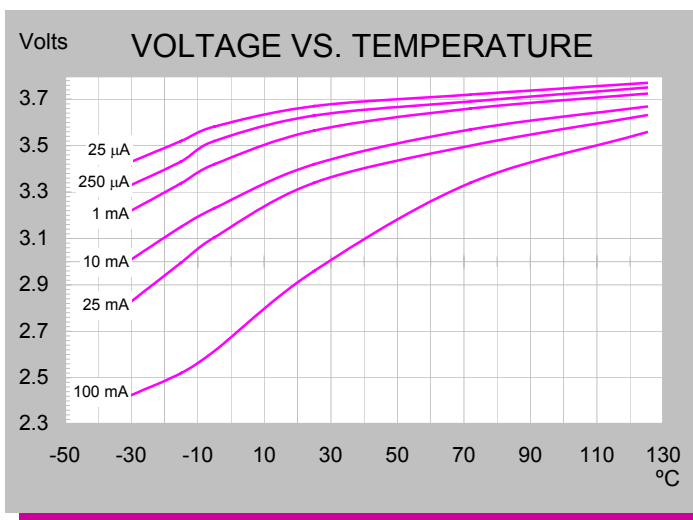

Extended Temperature Range

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.